The Selective Liquid-Phase Oxidation of 3,4,5-Trimethoxytoluene to 3,4,5-Trimethoxybenzaldehyde

Nobumasa Kitajima,* Kazuya Takemura, Yoshihiko Moro-oka,* Tadatsugu Yoshikuni,†
Mitsuo Akada,† Yoshihisa Tomotaki,† and Masatoshi Taniguchi†
Research Laboratory of Resources Utilization, Tokyo Institute of Technology,
4259 Nagatsuta, Midori-ku, Yokohama 227
†Tokushima Research Laboratory, Otsuka Chemical Co., Ltd.
463 Kagasuno, Kawauchi-cho, Tokushima 771-01
(Received August 10, 1987)

Synopsis. The selective liquid-phase oxidation of 3,4,5-trimethoxytoluene to 3,4,5-trimethoxybenzaldehyde, an important chemical intermediate for medicine production, was developed; when 2.0 mmol of the reactant was heated at 110 °C for 2 h in an autoclave under 3 atm O₂ with 10 ml of acetic acid in the presence of 0.75 mmol of Co(OAc)₂-Mn-(OAc)₂ (3:1 mole ratio), a 92% yield of the aldehyde was obtained.

3,4,5-Trimethoxybenzaldehyde, an important chemical intermediate for medicine production, is produced by a stoichiometric synthesis from vanillin or an electrochemical oxidation of 3,4,5-trimethoxytoluene in the current manufacturing processes.¹⁾ These procedures, however, still have several disadvantages which need to be improved. For example, a recent improvement in the electrochemical process has resulted in excessive electricity consumption. The liquid-phase oxidation of 3,4,5-trimethoxytoluene to 3,4,5-trimethoxybenzaldehyde is another attractive procedure from an industrial point of view. In a previous paper,²⁾ we demonstrated the potential effectiveness of the liquid-phase oxidation of substituted toluenes to the corresponding aldehydes; panisaldehyde could be obtained in a relatively high yield from p-methoxytoluene using multi-component metal salts. Through continuous efforts, we have developed a very selective method for the liquid-phase oxidation of 3,4,5-trimethoxytoluene to the aldehyde using a $Co(OAc)_2$ -Mn $(OAc)_2$ mixture as the catalyst.

Experimental

Materials. The acetic acid, Co(OAc)₂·4H₂O (purchased

from Wako), Mn(OAc)₂·4H₂O and all other reagents were used without further purification. 3,4,5-Trimethoxytoluene was obtained from Otsuka Chem. Co Ltd. 3,4,5-Trimethoxybenzyl alcohol and 3,4,5-trimethoxybenzyl acetate used as authentic standards for GC analysis were synthesized by an LAH reduction of 3,4,5-trimethoxybenzyl alcohol with acetic acid.

Procedure and Analysis. In a 50-ml autoclave, the substrate, catalysts, acetic acid, and the additives were mixed with a magnetic stirring bar. The autoclave was pressurized under 3.0 atm of O₂ and placed in an oil bath pre-warmed to the reaction temperature. After vigorous stirring for the prescribed time, the reaction was quenched by immersing the autoclave in an ice bath. After the reaction, naphthalene was added into the reaction mixture as an internal standard; the products were analyzed by GC on a Thermon 3000 on Chromosorb W.

Results and Discussion

Oxidation with Co(OAc)₂. The catalytic activities of various metal salts for the liquid-phase oxidation of 3,4,5-trimethoxytoluene were investigated. The results are summarized in Table 1. The reaction was carried out at 110 °C under 3 atm of O₂ in AcOH. With most of the metal salts, the reaction did not proceed. However, several cobalt salts, CoO, Co(OAc)₂·4H₂O, and Co₃(PO₄)₂·8H₂O, were found to be effective for the production of 3,4,5-trimethoxy-benzaldehyde. The other products include 3,4,5-trimethoxybenzyl acetate and 3,4,5-trimethoxybenzyl alcohol. No detectable amount of 3,4,5-trimethoxybenzoic acid was yielded. The time course of the reaction of the oxidation of 3,4,5-trimethoxytoluene

Table 1.	Liquid-Phase	Oxidations	ot 3	,4,5-	Trimethoxytoluene	with	various	Metai	Saits
----------	--------------	------------	------	-------	-------------------	------	---------	-------	-------

Motel colt	Conv.	Ph'CHO	Ph'CH ₂ OAc	Ph'CH ₂ OH	Ph'COOH
Metal salt	%	%	%	%	%
NiO	17.0	4.6	3.0	0	0
MnO_2	42.9	8.1	3.9	0	0
$Pd(NO_3)_2 \cdot 2H_2O$	64.7	0.6	12.5	0	0
$Ce(NO_3) \cdot 6H_2O$	84.9	6.4	36.1	0	0
CuCl	33.7	0	0	0	0
$FeCl_2 \cdot 4H_2O$	38.0	0	0	0	0
CoO	100.0	72.9	1.2	21.4	0
$CoF_2 \cdot 3H_2O$	31.4	5.6	6.8	0	0
$CoCl_2 \cdot 6H_2O$	16.0	0	0	0	0
$CoBr_2 \cdot 6H_2O$	19.8	0	0	0	0
$Co(OAc)_2 \cdot 4H_2O$	100.0	73.6	2.4	0	0
$Co_3(PO_4)_2 \cdot 8H_2O$	100.0	63.7	1.3	0	0

Ph' denotes 3,4,5-trimethoxyphenyl; O2, 3 atm; temp, 110°C; time, 2 h; Ph'CH3, 2.0 mmol; cat. amount, 0.5 mmol.

Table 2. Liquid-Phase Oxidations of 3,4,5-Trimethoxytoluene with Co(OAc)₂·4H₂O in the Presence of an Additive

Co(OAc) ₂ ·4H ₂ O	Additive	Conv.	Ph'CHO	Ph'CH ₂ OAc	Ph'CH ₂ OH	Ph'COOH
mmol	mmol	%	%	%	%	%
0.50	NaBr, 1.0	4.6	3.4	Trace	0	Trace
0.50	MgBr ₂ , 1.0	11.3	4.7	0	0	0
0.50	H ₂ O, 27.8	80.5	29.5	19.0	4.3	3.6
0.50	Ac ₂ O, 52.6	100.0	49.5	0	0	0
0.56	Ni(OAc)2·4H2O, 0.19	100.0	76.4	2.2	0	0
0.56	$Cr(OAc)_3 \cdot H_2O, 0.19$	100.0	76.8	0	0	0
0.56	Cu(OAc) ₂ ·H ₂ O, 0.19	65.2	45.1	22.6	0	0
0.56	$Ce(OAc)_3 \cdot H_2O, 0.19$	100.0	80.2	7.9	0	0
0.56	Mn(OAc) ₂ ·4H ₂ O, 0.19	100.0	91.2	4.2	0	0

O₂, 3 atm; temp, 110 °C; time, 2 h; Ph'CH₃, 2.0 mmol.

catalyzed by Co(OAc)₂·4H₂O was examined under the same reaction conditions employed for the experiments outlined in Table 1. The conversion of 3,4,5trimethoxytoluene initially increased with the reaction time and reached 100% at 1.5 h, when a 70% yield of 3,4,5-trimethoxybenzaldehyde was obtained. A further reaction did not increase the yield of 3,4,5trimethoxybenzaldehyde (the yields were almost constant). The by-products, mainly 3,4,5-trimethoxybenzyl acetate, were formed during the initial 1.5 h; however, they were only detectable in trace amounts for longer reaction times. The total material balance decreased significantly, implying the formation of undetermined polymeric products. The effects of the reaction temperature and O₂ pressure were investigated in order to optimize the reaction conditions to obtain higher yields of the aldehyde; however, with Co(OAc)₂·4H₂O, the maximum yield did not exceed 70%.

Synergism of Co(OAc)₂ and Mn(OAc)₂. The effects of several additives for the present reaction were examined (summarized in Table 2). The addition of metal bromides³⁾ critically lowered the catalytic activity; the yield of 3,4,5-trimethoxybenzaldehyde was very low. The addition of water⁴⁾ also retarded the catalytic activity. Ac₂O addition evidently enhances the activity; however, it causes an unpreferable further oxidation of the aldehyde.

The addition of several metal acetate salts were also attempted. Neither Cr(OAc)₃, Ni(OAc)₂ nor Cu(OAc)₂ resulted in a favorable improvement of the 3,4,5trimethoxybenzaldehyde yield. However, upon the addition of Ce(OAc)₃ or Mn(OAc)₂ a considerable improvement was found. Especially, a Co(OAc)₂-Mn- $(OAc)_2$ (3:1) mixture gave a very high yield of the aldehyde (91%). The synergistic effect of Co(OAc)₂ and Mn(OAc)₂ is evident from Fig. 1, in which the yield of 3,4,5-trimethoxybenzaldehyde is plotted against the ratio of $Mn(OAc)_2$ to $Mn(OA)_2+Co(OAc)_2$. Mn(OAc)₂, itself, shows only a low activity regarding oxidation. However, when it was combined with Co(OAc)₂, the mixture showed a higher activity for the production of 3,4,5-trimethoxybenzaldehyde than Co(OAc)₂ alone. The yield of the aldehyde strongly depends on the mixing ratio; the highest yield was obtained for a Co:Mn ratio of 3:1. The yield of the

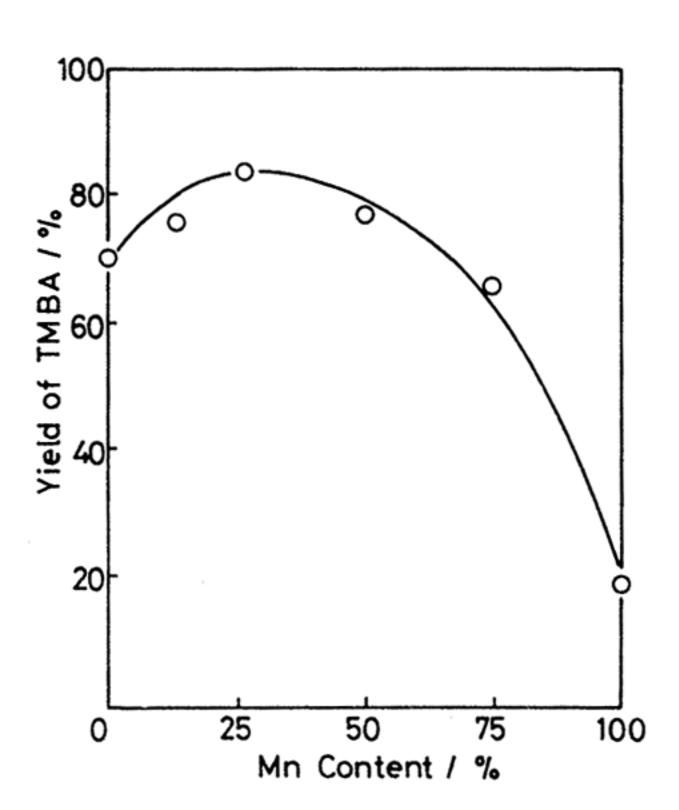


Fig. 1. The dependence of 3,4,5-trimethoxybenzal-dehyde (TMBA) yield on Mn content in the oxidation of 3,4,5-trimethoxytoluene with Co(OAc)₂-Mn(OAc)₂ catalyst. O₂, 3 atm; 3,4,5-trimethoxytoluene, 2.0 mmol; solvent(AcOH), 10 ml; Co(OAc)₂·4H₂O+Mn(OAc)₂·4H₂O 0.5 mmol; at 110 °C for 2 h.

aldehyde also depended upon the total amount of the catalyst. In the range of the catalyst amount up to 0.75 mmol (with the fixed Co:Mn ratio, 3:1), the yield was almost proportional to the amount of catalyst, and reached the highest yield. The use of more catalyst, however, did not affect the yield very much.

Since a relatively high concentration of the catalyst was required to obtain a high yield of 3,4,5-trimethoxybenzaldehyde, recycling uses of the catalyst are desirable for industrial applications. Hence, the repeated oxidations of 3,4,5-trimethoxytoluene with the recovered catalyst from the resulting reaction mixture by extraction were attempted. Almost no decline in the catalytic activity and selectivity was observed, even after repeating 25 times. These results indicate the high utility of the present catalytic system for industrial use.

References

1) T. Hirashima and I. Nishiguchi, J. Synth. Org. Chem.

1037

2) N. Kitajima, S. Sunaga, Y. Moro-oka, T. Yoshikuni,

M. Akada, Y. Tomotaki, and M. Taniguchi, Bull. Chem. Soc. Taguchi, N. Okabayashi, S. Futamura, and Y. Kamiya, Pre-

prints, 20th Ann. Symp. Oxi. React., p. 7 (1986). *Jpn.*, **61**, 967 (1988).

46, 164, (1969).

4) Y. Kamiya, "Yuki Sanka Hannou," Gihōdō (1973); T.